

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
31 January 2002 (31.01.2002)

PCT

(10) International Publication Number
WO 02/08581 A3

(51) International Patent Classification⁷: F01N 3/023,
11/00, 3/035, 3/08, 3/031

(21) International Application Number: PCT/JP01/06350

(22) International Filing Date: 23 July 2001 (23.07.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2000-227569 24 July 2000 (24.07.2000) JP
2000-227558 24 July 2000 (24.07.2000) JP
2001-133597 27 April 2001 (27.04.2001) JP
2001-140559 10 May 2001 (10.05.2001) JP


(71) Applicant (for all designated States except US): TOYOTA JIDOSHA KABUSHIKI KAISHA [JP/JP]; 1, Toyota-cho, Toyota-shi, Aichi 471-8571 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): HIROTA, Shinya [JP/JP]; C/O TOYOTA JIDOSHA KABUSHIKI KAISHA, 1, Toyota-cho, Toyota-shi, Aichi 471-8571 (JP). TANAKA, Toshiaki [JP/JP]; C/O TOYOTA JIDOSHA KABUSHIKI KAISHA, 1, Toyota-cho, Toyota-shi, Aichi 471-8571 (JP). ITOH, Kazuhiro [JP/JP]; C/O TOYOTA JIDOSHA KABUSHIKI KAISHA, 1, Toyota-cho, Toyota-shi, Aichi 471-8571 (JP). ASANUMA, Takamitsu [JP/JP]; C/O TOYOTA JIDOSHA KABUSHIKI KAISHA, 1, Toyota-cho, Toyota-shi, Aichi 471-8571 (JP). NAKATANI, Koichiro [JP/JP]; C/O TOYOTA JIDOSHA KABUSHIKI KAISHA, 1, Toyota-cho, Toyota-shi, Aichi 471-8571 (JP). KIMURA, Koichi [JP/JP]; C/O TOYOTA JIDOSHA KABUSHIKI KAISHA, 1, Toyota-cho, Toyota-shi, Aichi 471-8571 (JP).

[Continued on next page]

(54) Title: EXHAUST GAS PURIFICATION DEVICE

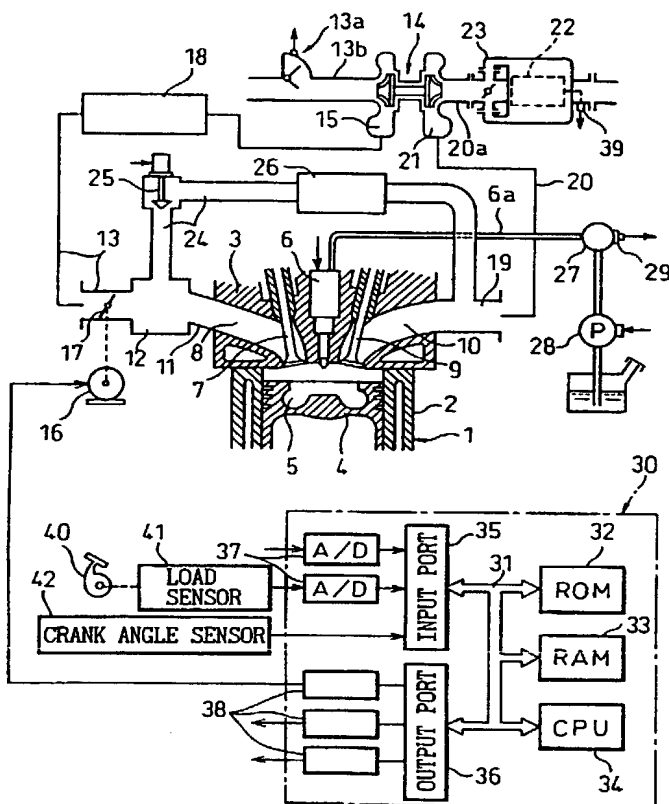

(57) Abstract: An exhaust gas purification apparatus, for an engine (1) having a combustion chamber (5), comprising an exhaust passage (10), a particulate filter arranged in the exhaust passage for removing particulate in exhaust gas exhausted from the combustion chamber by oxidation, and a device (30) for controlling the characteristics of the exhaust gas flowing into the particulate filter, wherein, when the judging means judges that the particulate filter will be deteriorated by heat, the controlling device changes the characteristics of the exhaust gas flowing into the particulate filter to prevent the particulate filter from being deteriorated by heat.

WO 02/08581 A3